

# Toslink Splitter

1input - 2output - **ID# 644**



**Operation Manual**

## Introduction

Digital TOSlink (Optical) Splitter 1 input: 2 output is a device for splitting one digital optical audio input source into two equal digital optical audio outputs. By using optical fibre cable you can run the audio signal up to 5 meters with reliable and lossless transmission. Extremely compact and simple to install and operate, the TOSlink Splitter is ideal for Home Theatre and Professional applications.


Designed to support S/PDIF standard of digital transmission which includes:  
-Compressed 2 channel and multi-channel Dolby and DTS audio signals and,  
-Uncompressed 2 channel Linear Pulse Code Modulation (LPCM) audio signals.  
The TOSlink Splitter 1 input : 2 output is operated by a 5vDC power supply. A red LED lamp indicates the units power status. The digital optical TOSlink connector input and outputs are clearly designated.

## Features

1. Supports S/PDIF standard of digital audio transmission.
2. Supports uncompressed 2-channel LPCM (Linear Pulse Code Modulation) audio signal.
3. Supports compressed 2-channel and multi-channel Dolby and DTS audio signal.
4. Provides electromagnetic-noise-free transmission.
5. Easy to install and simple to operate.


## Operating Functions and Controls

### Front Panel




**1. TOSLink (Optical Fiber) Input Port:** Connect the TOSLink input port to the TOSLink output port of audio equipment such as audio amplifier, AV receiver or DVD player.

### Rear Panel



**1. TOSLink (Optical Fiber) Output Ports A and B:** Connect the TOSLink output ports to the TOSLink input port of audio equipments such as audio amplifier and AV receiver

## Installation

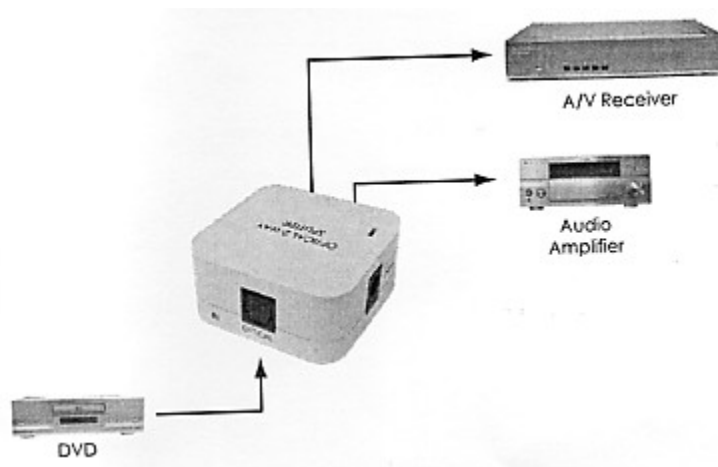

## Specifications

- **Input:** 1 x TOSLink (Optical Fiber)
- **Output:** 2 x TOSLink (Optical Fiber)
- **Power:** 5V/0.36-0.5A DC (US/EU standards, CE/FCC/UL certified)
- **Dimension:** 46(W) x 45.5(D) x 23.5(H)
- **Weight:** 22g
- **Chassis Material:** Plastic
- **Silk Skin Color:** White
- **Operating Temperature:** Operating from 0°C - 40°C